




MONI-PT100-EXE-AMB

AMBIENT SENSING TEMPERATURE SENSOR FOR HAZARDOUS AREA (PT100)

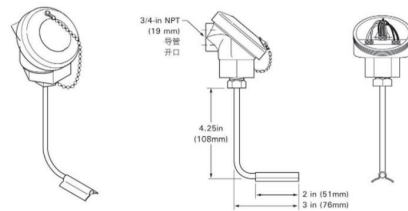

PRODUCT OVERVIEW

The MONI-PT100-EXE-AMB 3-wire Pt 100 temperature sensor connected to glass fiber reinforced polyester junction box. The sensor is approved for hazardous area and can be used in safe area.

The protection tube not only mechanically protects the actual temperature sensor it also prevents the sensor from sudden temperature changes caused by direct sunlight and or wind.

The MONI-PT100-EXE-AMB sensors need to be installed such that they measure a temperature

GENERAL FEATURES

Area of use	Hazardous area Zone 1 or Zone 2 Gas (Zone 21, Zone 22 Dust)
-------------	-------------------------------------------------------------

APPROVALS

ERT For Russia, Kazakhstan, Belarus.
For other countries contact your local Santo representative.

SENSOR

Type	Pt 100 (3-Wire) acc. DIN IEC 751, Class B
Material	Sensor: stainless steel (MI) Protection tube: brass
Temperature measuring range	Assembly -50°C to +60°C (Sensor measuring range from -100°C to +500°C)

ENCLOSURE

Material	Glass fiber reinforced box (Black) M4 captive stainless steel cover screws.
Ingress protection	IP66
Dimensions	Box: With = 80 mm Height = 75 mm Depth = 55 mm Installed: with = -110 Height = -200 mm
Cable entry	M20 (Ex e) suitable for cable diameters ranging form 10 mm to 14 mm
Operating temperature	-50°C to +60°C
Mounting	Surface mount via molded holes centered at 68 x 45 mm. Any installation position is allowed.

INSTALLATION AND CONNECTION

Terminals	4 front entry cage clamp terminals suitable for cables from 0.5- to 2.5 mm ²
-----------	-----------------------------------------------------------------------------------------

ORDERING DETAILS

Part number	2000-U52
-------------	----------